Waters™

Application Note

Metoprolol - LC/UV

Waters Corporation



This is an Application Brief and does not contain a detailed Experimental section.

Abstract

This application brief highlights the analysis of metoprolol using XTerra RP_{18} columns.

Introduction

Metroprolol has been analyzed in this study.

Experimental

HPLC Conditions

186000492)

Mobile phase: At pH 3.0: $H_2O/ACN/100$ mM, NH_4COOH , pH

3.0, 55:35:10

At pH 7.0: $H_2O/ACN/100$ mM, NH_4HCO_3 , pH 7.0,

35:55:10

At pH 10.0 $H_2O/ACN/100$ mM, NH_4HCO_3 , pH

10.0, 60:30:10

Flow rate: 1.0 mL/min

Injection volume: 5 μ L of 250 μ g/mL


Temperature: 30 °C

Detection: UV @ 270 nm

Instrument:

| Mobile Phase pH | USP Tailing |
|-----------------|-------------|
| 3.0 | 1.17 |
| 7.0 | 1.33 |
| 10.0 | 1.14 |

Results and Discussion

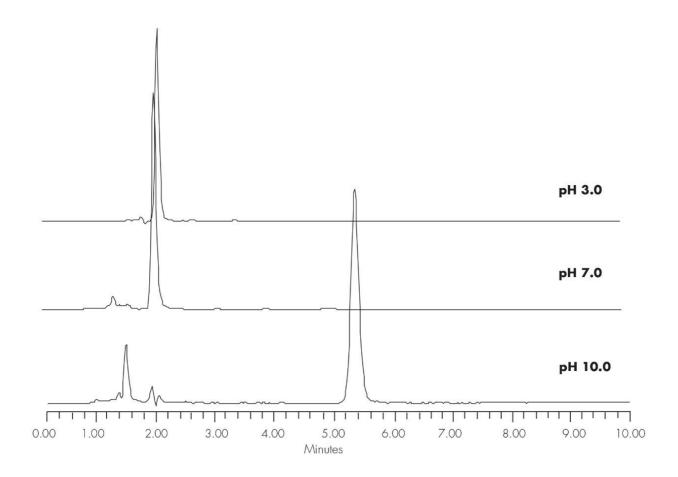

Featured Products

Alliance HPLC https://www.waters.com/514248

WA20738.071, June 2002

© 2021 Waters Corporation. All Rights Reserved.