Waters™

アプリケーションノート

Naltrexone in Serum

Waters Corporation




This is an Application Brief and does not contain a detailed Experimental section.

Abstract


This application brief highlights the analysis of naltrexone in serum.

Introduction

Compounds used in this application brief includes naloxone (I.S.), and naltrexone.



1. Naloxone (I.S.)



2. Naltrexone

Experimental

HPLC Conditions

Column: Symmetry Shield RP8, 3.0×150 mm, $5 \mu m$

Guard column: Sentry guard column, 3.9 x 20 mm, 5 μm

Part numbers: Column - WAT094243, Guard - WAT200675

Mobile phase: 20 mM ammonium acetate, pH 5/acetonitrile,

90:10

Flow rate: 0.6 mL/min


Injection volume: $20~\mu L~of~reconstituted~porcine~serum~extract$

Temperature: 25° C

Detection: UV @ 215 nm


Oasis® HLB Extraction Method

Oasis® HLB 1 cc/30 mg Extraction Cartridge Part Number WAT094225

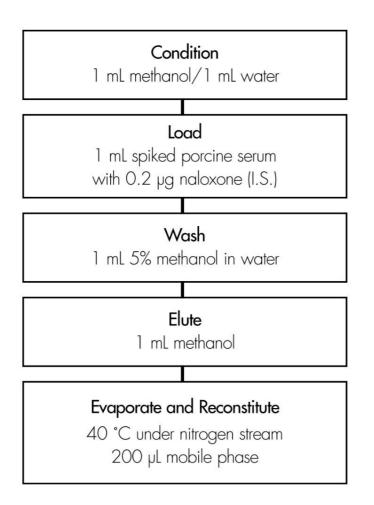

Compound	Concentration µg/mL	% Recovery	%RSD (n=6)
Naltrexone	0.200	98%	3.2%
	1.00	100%	3.5%

Results and Discussion

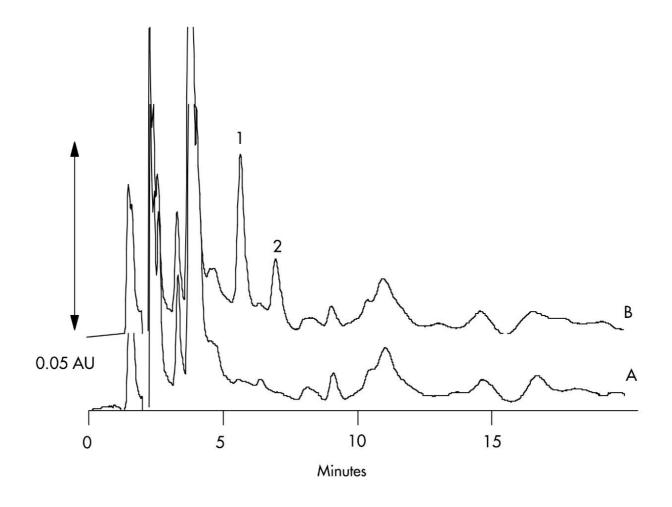

Featured Products

Alliance HPLC https://www.waters.com/514248

WA31763.109, June 2003

© 2021 Waters Corporation. All Rights Reserved.