Waters™

應用手冊

Steroids - 4.6 x 20 mm Intelligent Speed Separation

Waters Corporation



This is an Application Brief and does not contain a detailed Experimental section.

Abstract

This application brief demonstrates analysis of steroids using 4.6 x 20 mm Intelligent Speed Separation Column.

Introduction

The compounds used in this study are -

- 1. Prednisone
- 2. Cortisone
- 3. Corticosterone
- 4. Estradiol
- 5. Estrone
- 6. Progesterone

Experimental

HPLC Method

Column: Symmetry C_{18} , 4.6 x 20 mm, 3.5 μm IS

Symmetry Shield RP₁₈, 4.6 x 20 mm, 3.5 μm IS

Part numbers: Symmetry - 186002090

Symmetry Shield - 186002092

Mobile phase A: Water

Mobile phase B: ACN

Flow rate: 3.0 mL/min

Injection volume: 10 μ L


Temperature: 30 °C


Detection: UV @ 220 nm

Gradient

Time (min)	Profile	
	%A	%B
0	80	20
4	36	64

Results and Discussion

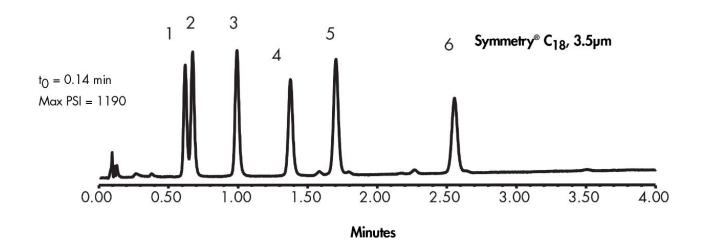

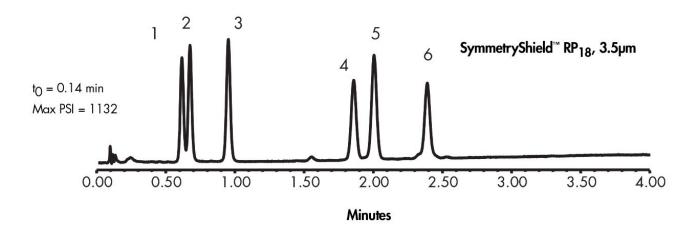

Featured Products

WA31763.152, June 2003

 \wedge

© 2021 Waters Corporation. All Rights Reserved.