Waters™

Applikationsbericht

Albuterol (Salbutamol) in Serum

Waters Corporation



This is an Application Brief and does not contain a detailed Experimental section.

Abstract

This application brief highlights the analysis of Albuterol in serum using Symmetry C_{18} columns.

Introduction

Compounds used in this study are:

- 1. Salbutamol
- 2. Bamethan (I.S.)

Experimental

HPLC Method

Injection volume:

Detection:


Column:	Symmetry C ₁₈ , 3.9 x 150 mm, 5 μm(p/n: WAT046980)
Guard Column:	Sentry Guard Column 3.9 x 20 mm, 5 µm(p/n: WAT054250)
Mobile phase:	5 mM hexanesulfonate and 1% glacial acetic acid in water/1% glacial acetic acid in methanol, 75:25
Flow rate:	1.0 mL/min

20 µL of reconstituted porcine serum extract


Fluorescence, Ex = 275 nm, Em = 310 nm

Oasis® HLB Extraction Method

Oasis® HLB 1 cc/30 mg Extraction Cartridge Part Number WAT094225

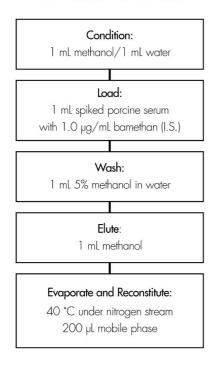

Results and Discussion

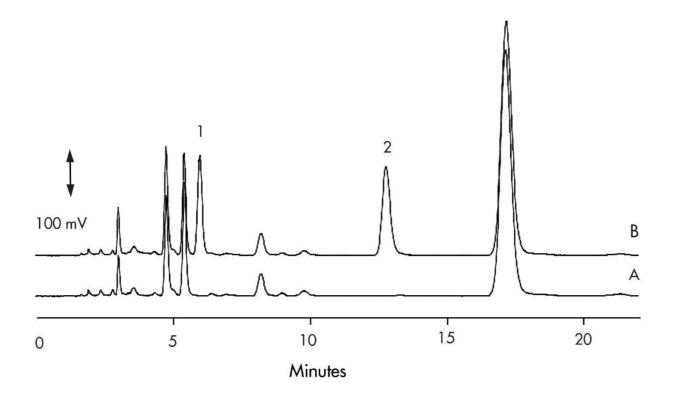

Compound	Concentration µg/mL	% Recovery	%RSD (n=6)
Salbutamol	0.400	98.8%	3.4%
	2.00	98.0%	3.5%

Featured Products

WA31763.19, June 2003

© 2021 Waters Corporation. All Rights Reserved.