Waters™

Nota de aplicación

Valethamate in Urine by Mixed-Mode Weak Cation Exchange and LC-MS/MS

Waters	Corr	oratio	n
vvalcis	\circ	JOIALIC	/ I I


This is an Application Brief and does not contain a detailed Experimental section.

Abstract

This application brief demonstrates analysis of valethamate in urine by mixed-mode weak cation exchange and LC-MS/MS.

Introduction

The compound analyzed in this study is Valethamate.



Valethamate

Experimental

LC Conditions

Column: XTerra MS C_{18} 2.1 x 20 mm \emph{IS} , 3.5 μm Part number: 186001923 Mobile phase A: 10 mM NH₄HCO₃, pH 10 Mobile phase B: MeOH with 10 mM NH $_4$ HCO $_3$, pH 10 Flow rate: 0.4 mL/min Injection volume: 10 µL Column temperature: Ambient Instrument: Waters 2777 Sample Manager and Waters 1525µ

Binary HPLC Pump

Gradient

Time (min)	%A	%B
0.0	95	5
3.0	5	95
4.0	5	95
4.1	95	5
5.0	95	5

MS Conditions

Waters Micromass Quattro Ultima

ESI+

Source temp.: 150 °C

Desolvation temp.: 350 °C

Cone gas flow: 50 L/Hr

Desolvation gas flow: 550 L/Hr


Collision cell: 2.2e⁻³ bar (Argon gas)

Cone voltage: 35 volts

CID: 20eVMRM transition: m/z 306.1 \Rightarrow 218.9


Oasis® WCX µElution Plate

Part Number: 186002499

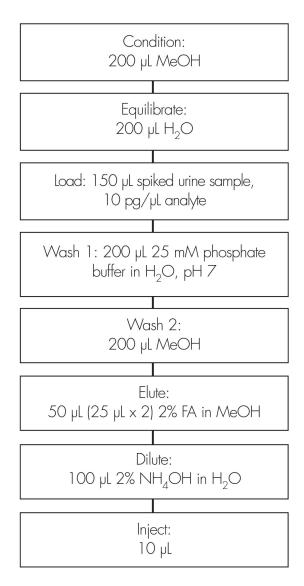

Results and Discussion

104% Recovery

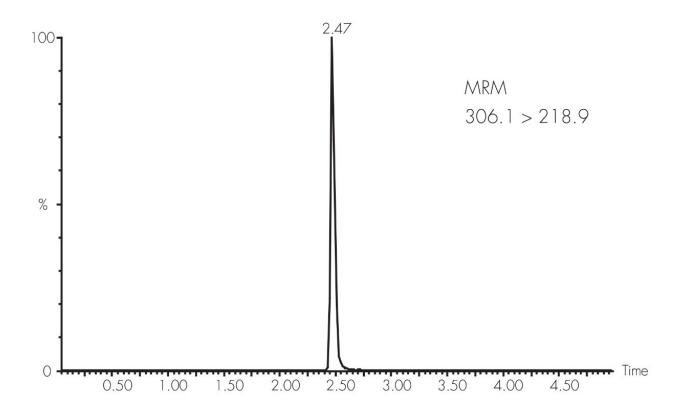

Featured Products

WA31764.199, June 2003

© 2022 Waters Corporation. All Rights Reserved.						