Waters™

アプリケーションノート

Valethamate in Urine by Mixed-Mode Weak Cation Exchange and LC-MS/MS




This is an Application Brief and does not contain a detailed Experimental section.

Abstract

This application brief demonstrates analysis of valethamate in urine by mixed-mode weak cation exchange and LC-MS/MS.

Introduction

The compound analyzed in this study is Valethamate.



Valethamate

Experimental

LC Conditions

Column: XTerra MS C_{18} 2.1 x 20 mm /S, 3.5 μ m Part number: 186001923

Mobile phase A: 10 mM NH₄HCO₃, pH 10

Mobile phase B: MeOH with 10 mM NH₄HCO₃, pH 10

Flow rate: 0.4 mL/min

Injection volume: 10 μ L

Column temperature: Ambient

Instrument: Waters 2777 Sample Manager and Waters 1525µ

Binary HPLC Pump

Gradient

Time (min)	%A	%B
0.0	95	5
3.0	5	95
4.0	5	95
4.1	95	5
5.0	95	5

MS Conditions

Waters Micromass Quattro Ultima

ESI+

Source temp.: 150 °C


Desolvation temp.: 350 °C

Cone gas flow: 50 L/Hr

Desolvation gas flow:	550 L/Hr
Collision cell:	2.2e ⁻³ bar (Argon gas)
Cone voltage:	35 volts
CID:	20eV
MRM transition:	$m/z 306.1 \rightarrow 218.9$


Oasis® WCX µElution Plate

Part Number: 186002499

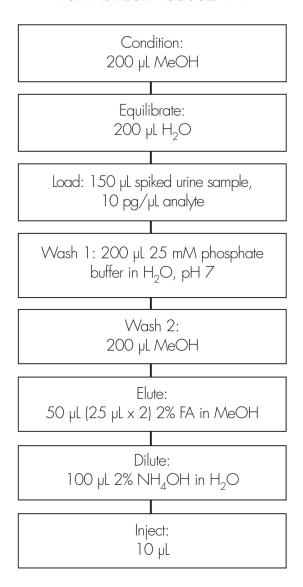

Results and Discussion

104% Recovery

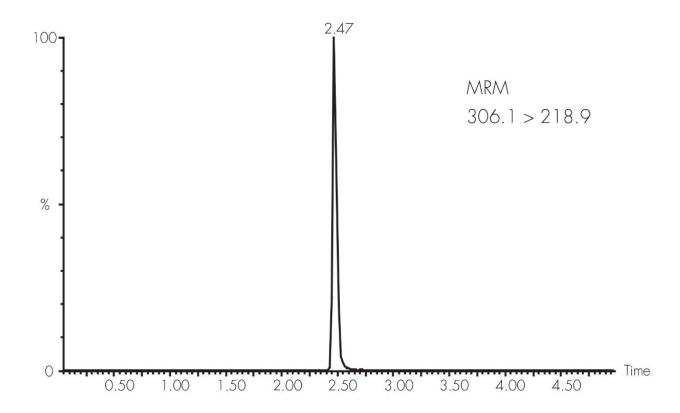

Featured Products

WA31764.199, June 2003

© 2022 Waters Corporation. All Rights Reserved.				