Waters™



Valethamate in Urine by Mixed-Mode Weak Cation Exchange and LC-MS/MS

Waters Corporation


This is an Application Brief and does not contain a detailed Experimental section.

Abstract

This application brief demonstrates analysis of valethamate in urine by mixed-mode weak cation exchange and LC-MS/MS.

Introduction

The compound analyzed in this study is Valethamate.



Valethamate

Experimental

LC Conditions

Column: XTerra MS C_{18} 2.1 x 20 mm /S, 3.5 μ m

Part number: 186001923

Mobile phase A: 10 mM NH₄HCO₃, pH 10

Mobile phase B: MeOH with 10 mM NH₄HCO₃, pH 10

Flow rate: 0.4 mL/min

Injection volume: $10 \mu L$

Column temperature: Ambient

Instrument: Waters 2777 Sample Manager and Waters 1525

μ Binary HPLC Pump

Gradient

Time (min)	%A	%B	
0.0	95	5	
3.0	5	95	
4.0	5	95	
4.1	95	5	
5.0	95	5	

MS Conditions

Waters Micromass Quattro Ultima

ESI+

Source temp.: 150 °C

Desolvation temp.: 350 °C

Desolvation gas flow: 550 L/Hr

Collision cell: 2.2e⁻³ bar (Argon gas)

50 L/Hr

Cone voltage: 35 volts


CID: 20eV

Cone gas flow:

MRM transition: $m/z 306.1 \rightarrow 218.9$


Oasis® WCX µElution Plate

Part Number: 186002499

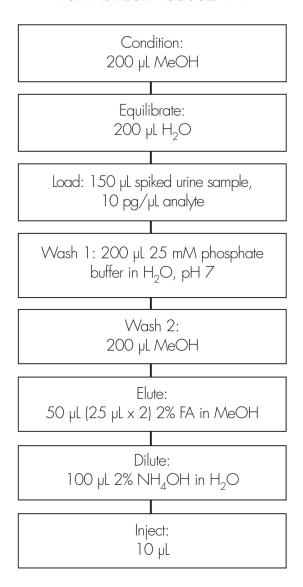

Results and Discussion

104% Recovery

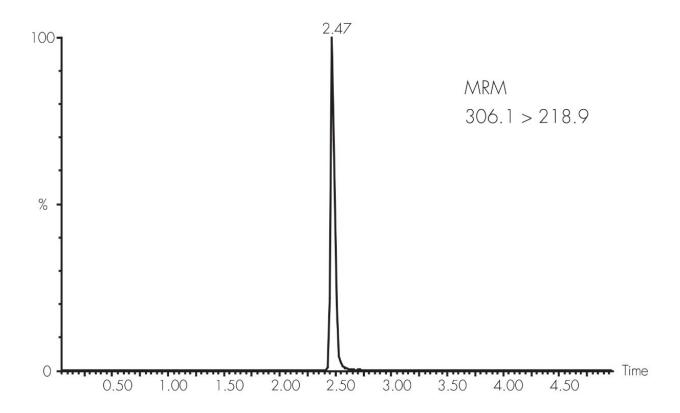

Featured Products

WA31764.199, June 2003

© 2022 Waters Corporation. All Rigl	hts Reserved.	