

Applikationsbericht

# Amitrole in River Water

Waters Corporation


This is an Application Brief and does not contain a detailed Experimental section.

#### Abstract

This application brief demonstrates analysis of amitrole in river water.

#### Introduction

The compound analyzed in this study is amitrole.



## Experimental

## LC Conditions

Column:	Waters Spherisorb Silica, 2 x 100 mm, 3 $\mu m$
Part number:	PSS832022
Mobile phase A:	Acetonitrile
Mobile phase B:	0.05% phosphoric acid
Flow rate:	200 µL/min
Instrument:	Alliance 2695 Separations Module

#### Gradient


Time	Profile	
(min)	%A	%B
0	100	0
5	0	100

#### **MS** Conditions


MS instrument:	Micromass ZQ
lon source:	ESI+
Mode:	Multiple selected-ion recording
Source temp.:	150 °C
Desolvation temp.:	450 °C
Drying gas:	500 L/hr
Cone:	50 V

## OASIS® MCX EXTRACTION METHOD

Oasis® MCX Extraction Cartridge, 6 cc/150 mg (LP) Part Number: 186000255

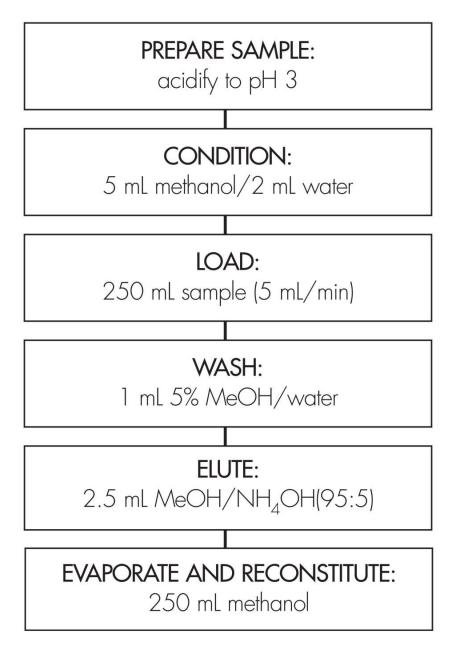

#### **Results and Discussion**

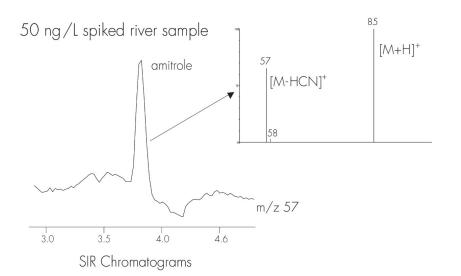

1 Calculated against standard prepared in matrix. Matrix suppres sion was approximately 10%

Featured Products

WA31764.41, June 2003

© 2022 Waters Corporation. All Rights Reserved.