


Applikationsbericht

Analysis of Mono-, Di- and Oligosaccharides Using ACQUITY UPLC BEH Amide Columns

Waters Corporation

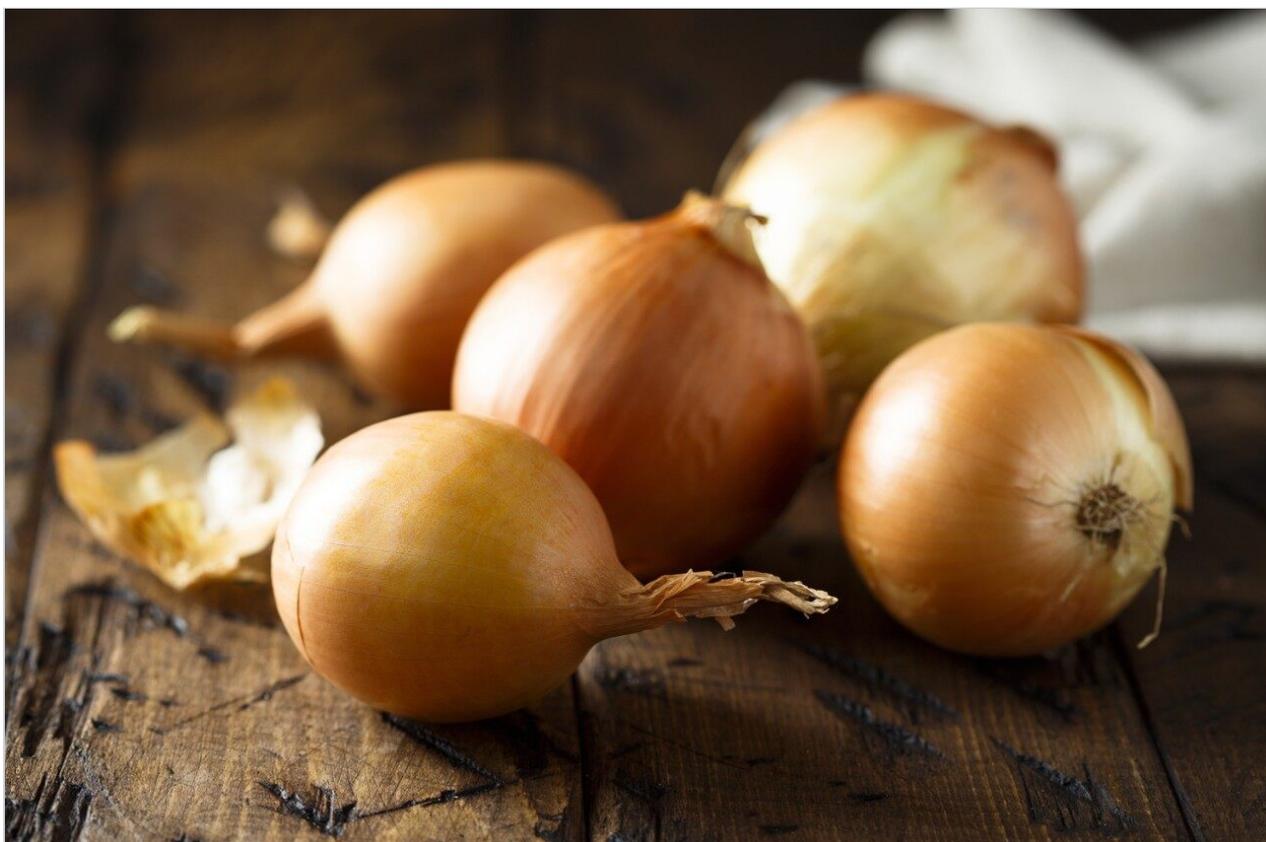

This is an Application Brief and does not contain a detailed Experimental section.

Abstract


This application brief describes the analysis of Oligosaccharides using ACQUITY UPLC BEH Amide Columns.

Introduction


Compounds used for this study includes:

1. p-Toluamide
2. Fructose
3. Glucose
4. Sucrose
5. Maltose
6. Maltotriose
7. Maltotetraose
8. Maltopentaose
9. Maltohexahose
10. Maltoheptaose


STRUCTURES

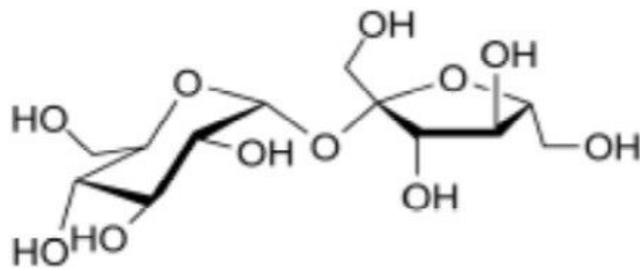


Sucrose

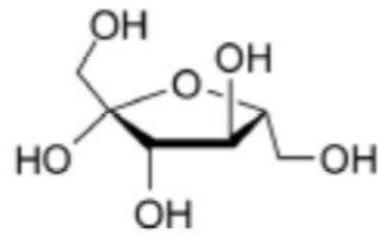


Fructose

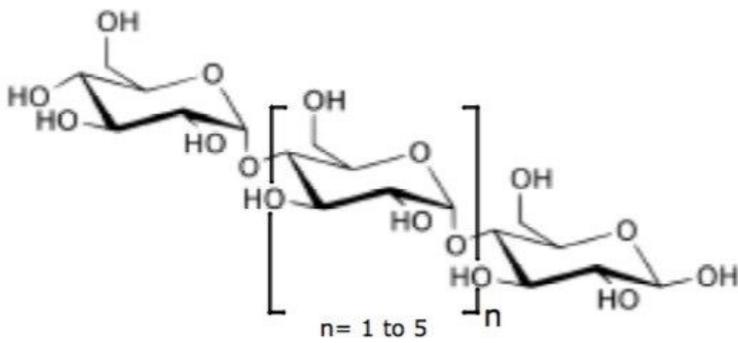


Maltooligosaccharides

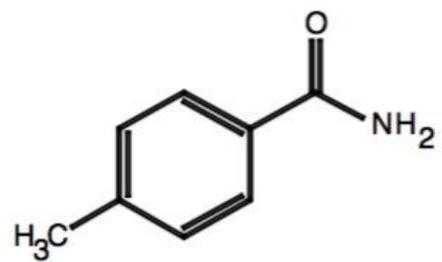

p-Toluamide
(unretained compound)

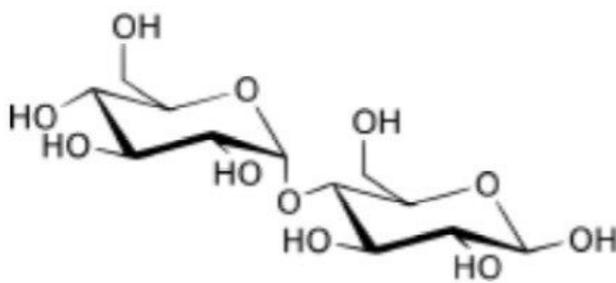

Maltose

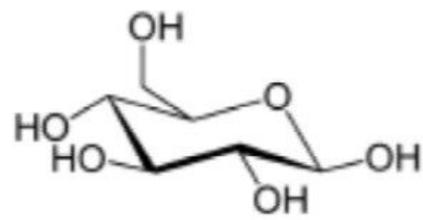

Glucose

Experimental

Chromatographic Conditions

Column: ACQUITY UPLC BEH Amide 2.1 x 50 mm, 1.7 μ m

Part Number: 186004800

Mobile Phase A: 80/20 MeCN/H₂O with 0.05% triethylamine [TEA]

Mobile Phase B: 30/70 MeCN/H₂O with 0.05% triethylamine [TEA]

Flow Rate: 0.17 mL/min

Gradient: 5 minute gradient, 80%-50% MeCN

Injection Volume: 0.7 μ L (PLNO)

Sample Concentration: 1 mg/mL each

Sample Diluent: 50/50 MeCN/H₂O

Column Temperature: 35 $^{\circ}$ C

Strong Needle Wash: 20/80 MeCN/H₂O (800 μ L)

Weak Needle Wash: 75/25 MeCN/H₂O (500 μ L)

Seal Wash: 50/50 MeCN/H₂O

Instrument: Waters ACQUITY UPLC with ELSD

Gradient:


| Time (min) | %A | %B |
|------------|--------|------|
| 0.00 | 100.00 | 0.00 |

| Time (min) | %A | %B |
|------------|--------|-------|
| 5.00 | 40.00 | 60.00 |
| 5.01 | 100.00 | 0.00 |
| 15.00 | 100.00 | 0.00 |

ELSD Conditions

| | |
|-------------------------|---------|
| Gain: | 200 |
| Pressure: | 40 psi |
| Drift Tube Temperature: | 40 °C |
| Nebulizer: | Cooling |
| Data Rate: | 10 pps |
| Filter Time Constant: | Normal |

Results and Discussion

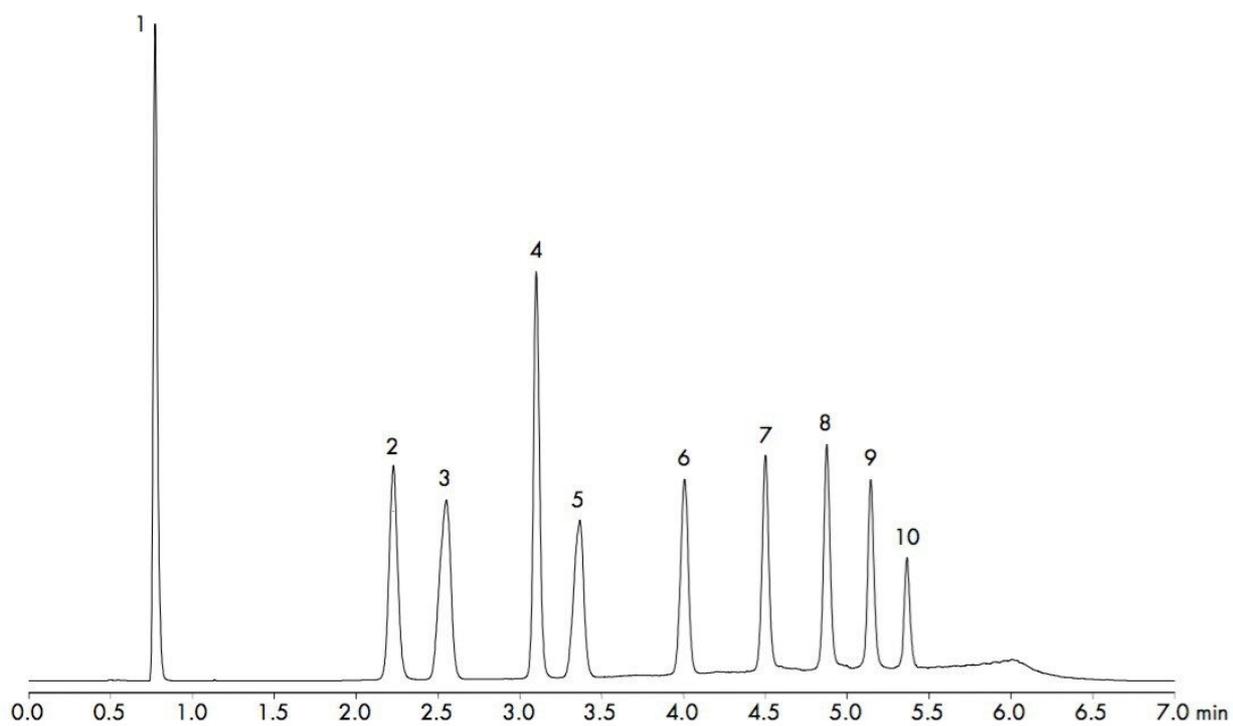

Featured Products

ACQUITY UPLC System <<https://www.waters.com/514207>>

ACQUITY UPLC ELS Detector <<https://www.waters.com/514219>>

WA60110, October 2009