# Waters™

應用手冊

# Analysis of Mono-, Di- and Oligosaccharides Using ACQUITY UPLC BEH Amide Columns

Waters Corporation



This is an Application Brief and does not contain a detailed Experimental section.

#### **Abstract**

This application brief describes the analysis of Oligosaccharides using ACQUITY UPLC BEH Amide Columns.

### Introduction

Compounds used for this tudy includes:

- 1. p-Toluamide
  - 2. Fructose
  - 3. Glucose
  - 4. Sucrose
  - 5. Maltose
  - 6. Maltotriose
- 7. Maltotetraose
- 8. Maltopentaose
- 9. Maltohexahose
- 10. Maltoheptaose

# **STRUCTURES**

Experimental

## **Chromatographic Conditions**

Maltose

Column: ACQUITY UPLC BEH Amide 2.1 x 50 mm, 1.7  $\mu$ m

Glucose

Part Number: 186004800 Mobile Phase A: 80/20 MeCN/H<sub>2</sub>O with 0.05% triethylamine [TEA] Mobile Phase B: 30/70 MeCN/H<sub>2</sub>O with 0.05% triethylamine [TEA] Flow Rate: 0.17 mL/min Gradient: 5 minute gradient, 80%-50% MeCN Injection Volume: 0.7 μL (PLNO) Sample Concentration: 1 mg/mL each Sample Diluent: 50/50 MeCN/H<sub>2</sub>O Column Temperature: 35 °C Strong Needle Wash: 20/80 MeCN/H<sub>2</sub>O (800 μL) Weak Needle Wash:  $75/25 \text{ MeCN/H}_2\text{O} (500 \mu\text{L})$ Seal Wash: 50/50 MeCN/H<sub>2</sub>O Instrument: Waters ACQUITY UPLC with ELSD Gradient: Time (min) %A %B 0.00 100.00 0.00 5.00 40.00 60.00

 Time (min)
 %A
 %B

 5.01
 100.00
 0.00

 15.00
 100.00
 0.00

#### **ELSD Conditions**

Gain: 200

Pressure: 40 psi


Drift Tube Temperature: 40 °C

Nebulizer: Cooling

Data Rate: 10 pps

Filter Time Constant: Normal

### Results and Discussion

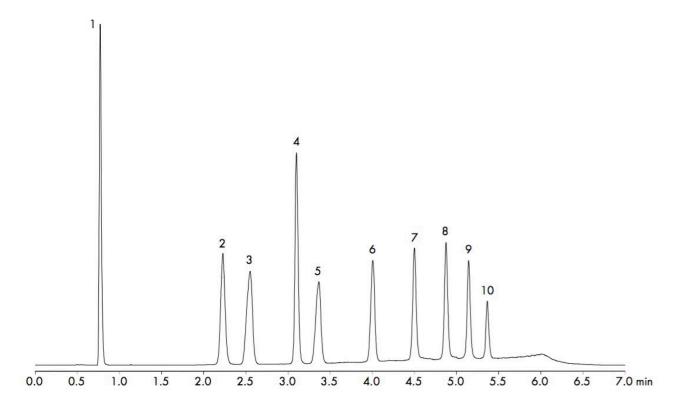

### **Featured Products**

- · ACQUITY UPLC System <a href="https://www.waters.com/514207">https://www.waters.com/514207</a>
- ACQUITY UPLC ELS Detector <a href="https://www.waters.com/514219">https://www.waters.com/514219</a>

WA60110, October 2009

© 2021 Waters Corporation. All Rights Reserved.