Waters™

應用手冊

Analysis of Food Sugars in Prepared Foods Using ACQUITY UPLC BEH Amide Columns

Waters Corporation

This is an Application Brief and does not contain a detailed Experimental section.


Abstract

This application brief describes the analysis of food sugars in prepared food using ACQUITY UPLC BEH Amide Columns.


Introduction

Compounds used for this study includes:


- 1. p-Toluamide
- 2. Fructose
- 3. Glucose
- 4. Sucrose
- 5. Maltose

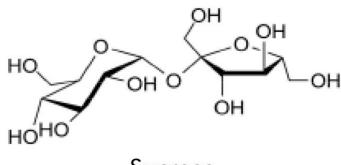


Sucrose






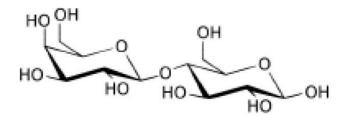


Lactose



p-Toluamide (unretained compound)

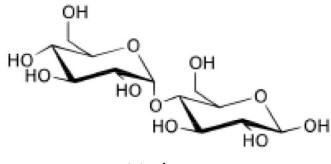

Maltose



Glucose

Experimental

Chromatographic Conditions


Column:	ACQUITY UPLC BEH Amide 2.1 x 50 mm, 1.7 μm
Part number:	186004800
Mobile phase A:	80/20 acetone/H ₂ O with 0.05% triethylamine [TEA]
Mobile phase B:	30/70 acetone/H ₂ O with 0.05% triethylamine [TEA]
Flow rate:	0.15 mL/min
Flow profile:	95% A/5% B (77.5% acetone with 0.05% TEA)
Injection volume:	0.7 μL (PLNO)
Sample concentration:	Standards at 1 mg/mL each
Sample diluent:	50/50 MeCN/H ₂ O
Column temperature:	85 °C
Strong needle wash:	20/80 MeCN/H ₂ O (800 μL)
Weak needle wash:	75/25 MeCN/H ₂ O (500 μL)
Seal wash:	50/50 MeCN/H ₂ O

Instrument:

ELSD Conditions

Gain:	200
Pressure:	40 psi
Drift tube temperature:	40 °C
Nebulizer:	Cooling
Data rate:	10 pps

Results and Discussion

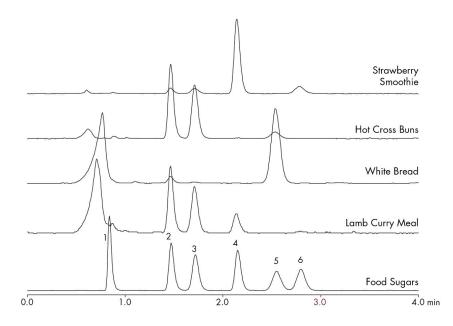

Featured Products

ACQUITY UPLC ELS Detector <https://www.waters.com/514219>

WA60115, October 2009

© 2022 Waters Corporation. All Rights Reserved.