Waters™

Applikationsbericht

Analysis of Food Sugars/Saccharides in Maple Syrup Using ACQUITY UPLC BEH Amide Columns

Waters Corporation

This is an Application Brief and does not contain a detailed Experimental section.

Abstract

This application brief highlights the analysis of food sugars/saccharides in maple syrup using ACQUITY UPLC BEH Amide Columns.

Introduction

Structures

Maltooligosaccharides

Experimental

Chromatographic Conditions

Column: ACQUITY UPLC BEH Amide 2.1 x 100 mm, 1.7 µm Part Number: 186004801 Mobile Phase A: 80/20 MeCN/H₂O with 0.2% triethylamine [TEA] Mobile Phase B: 30/70 MeCN/H₂O with 0.2% triethylamine [TEA] Flow Rate: 0.13 mL/min Gradient: 10 minute gradient, 80%-50% MeCN (w/0.2% TEA) with 25 minute re-equilibration Injection Volume: 1.3 µL (PLNO) Sample Concentration: Maple syrups at 5-10 mg/mL each Sample Diluent: 50/50 MeCN/H₂O Column Temperature: 35 °C Strong Needle Wash: 20/80 MeCN/H₂O (800 μL) Weak Needle Wash: $75/25 \text{ MeCN/H}_2\text{O} (500 \mu\text{L})$ Seal Wash: 50/50 MeCN/H₂O Instrument: Waters ACQUITY UPLC with ELSD

Gradient

Time (min)	Profile		
	%A	%B	
0.00	100.00	0.00	
10.00	40.00	60.00	
10.01	100.00	0.00	
35.00	100.00	0.00	

EL SD Conditions


Gain:	200
Pressure:	40 psi
Drift Tube Temperature:	40 °C
Nebulizer:	Cooling
Data Rate:	10 pps
Filter Time Constant:	Normal

Results and Discussion

The compounds analysed in this study are:

- 1. Fructose
- 2. Glucose

- 3. Sucrose
- 4. Maltose
- 5. Maltotriose
- 6. Maltotetraose
- 7. Maltopentaose

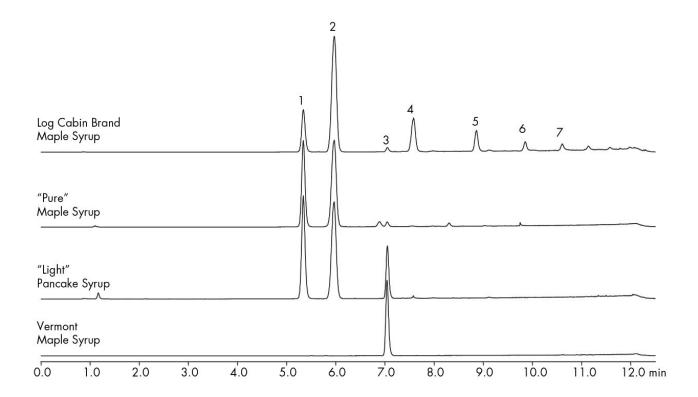

Featured Products

ACQUITY UPLC ELS Detector https://www.waters.com/514219

WA60123, October 2009

© 2022 Waters Corporati	on. All Rights Rese	rved.	