Waters™



Analysis of Cellulosic Hydrolysates Using ACQUITY UPLC BEH Amide Columns

Waters Corporation

This is an Application Brief and does not contain a detailed Experimental section.

Abstract

This application brief highlights the analysis of cellulosic hydrolysates using ACQUITY UPLC BEH Amide Columns.

Introduction

The compounds analysed in this study are:

- 1. Xylose
- 2. Fructose
- 3. Mannose
- 4. Glucose

- 5. Sucrose
- 6. Cellobiose
- 7. Melezitose
- 8. Raffinose
- 9. Maltotriose
- 10. Maltotetraose
- 11. Maltopentaose
- 12. Maltohexaose
- 13. Maltoheptaose

Experimental

Chromatographic Conditions

Column:

ACQUITY UPLC BEH Amide 2.1 x 100 mm, 1.7

μm Part Number: 186004801 Mobile Phase A: 80/20 MeCN/H₂O with 0.2% triethylamine [TEA] Mobile Phase B: 30/70 MeCN/H₂O with 0.2% triethylamine [TEA] Flow Rate: 0.12 mL/min Gradient: 10 minute gradient, 80%-50% MeCN (w/0.2% TEA) with 30 minute re-equilibration Injection Volume: 1.3 μL (PLNO) Sample Concentration: 1 mg/mL each Sample Diluent: 50/50 MeCN/H₂O Column Temperature: 35 °C Strong Needle Wash: $20/80 \text{ MeCN/H}_2\text{O} (800 \mu\text{L})$ Weak Needle Wash: $75/25 \text{ MeCN/H}_2\text{O} (500 \mu\text{L})$

50/50 MeCN/H₂O

Waters ACQUITY UPLC with ELSD

Seal Wash:

Instrument:


Gradient

Time	Profile	
(min)	%A	%B
0.00	100.00	0.00
10.00	60.00	40.00
10.01	100.00	0.00
40.00	100.00	0.00

ELSD Conditions

Gain:	200
Pressure:	40 psi
Drift Tube Temperature:	40 °C
Nebulizer:	Cooling
Data Rate:	10 pps
Filter Time Constant:	Normal

Results and Discussion

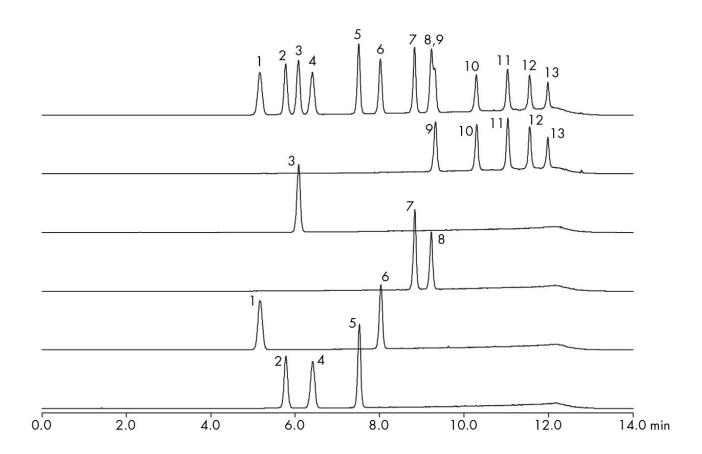

Featured Products

ACQUITY UPLC ELS Detector https://www.waters.com/514219

WA60127, October 2009

© 2022 Waters Corporation. All Rights Reserved.