Waters™

アプリケーションノート

Gradient Separation of Morphine and Metabolites on ACQUITY UPLC BEH HILIC

日本ウォーターズ株式会社



For forensic toxicology use only.

This is an Application Brief and does not contain a detailed Experimental section.

Abstract

This application brief demonstrates the gradient separation of morphine and metabolites on ACQUIT	Υ
UPLC BEH HILIC Columns	

Introduction

The compounds	used in	this s	study are:
---------------	---------	--------	------------

- 1. 10-Hydroxymorphine
- 2. Morphine-3β-D-glucuronide
- 3. Morphine-6β-D-glucuronide
- 4. Morphine
- 5. Morphine N-oxide
- 6. 6-Acetylmorphine

Experimental

Test Conditions

Column: ACQUITY UPLC BEH HILIC, 2.1 x 100 mm,

1.7 μm

Part Number: 186003461

Mobile Phase A: 10 mM NH₄COOH in H₂O, 0.125% HCOOH

in 50:50 ACN:H₂O

Mobile Phase B: 10 mM NH₄COOH in H₂O, 0.125% HCOOH


in 90:10 ACN:H₂O

Flow Rate: 0.5 mL/min

Injection Volume:	15 μL
Sample Concentration:	50 ng/mL each
Sample Diluent:	75:25 ACN:MeOH
Column Temperature:	30 °C
Instrument:	Waters ACQUITY UPLC with TQD
MRM:	Morphine $286 > 201$ Morphine- 3β -D-glucuronide $462 > 286$ Morphine- 6β -D-glucuronide $462 > 286$ Morphine N-oxide $302 > 162$ 6-acetylmorphine $328 > 165$ 10-hydroxymorphine $302 > 58$
Dwell Time:	25 ms
ISD:	10 ms
ICD:	10 ms
Gradient	
Time (min)	Profile
	%A
0.00	0.1
5.00	99.9
7.00	99.9
7.10	0.1

Time (min)	Profile
10.00	0.1

Results and Discussion

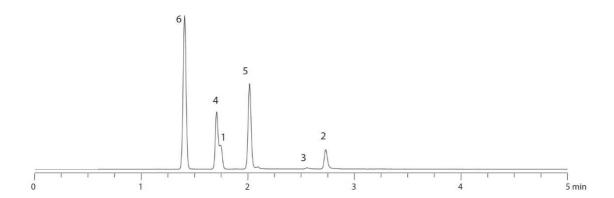

Featured Products

ACQUITY UPLC System https://www.waters.com/514207

WA60130, August 2009

© 2021 Waters Corporation. All Rights Reserved.