Waters™

Application Note

Gradient Separation of Nutrients on ACQUITY UPLC BEH HILIC

Waters Corporation



This is an Application Brief and does not contain a detailed Experimental section.

Abstract

This application brief demonstrates the gradient separation of nutrients on ACQUITY UPLC BEH HILIC Columns.

Introduction

The compounds used in this study are:

- 1. Nicotinamide
- 2. Nicotinic acid
- 3. Thiamine

Nicotinamide

Nicotinic acid

Thiamine

Experimental


Test Conditions

Column:	ACQUITY UPLC BEH HILIC, 2.1 x 50 mm, 1.7 μ m
Part Number:	186003460
Mobile Phase A:	10 mM NH ₄ COOH in H ₂ O, 0.125% HCOOH in 50:50 ACN:H ₂ O
Mobile Phase B:	10 mM NH ₄ COOH in H ₂ O, 0.125% HCOOH in 90:10 ACN:H ₂ O
Flow Rate:	1.235 mL/min
Injection Volume:	5 μL
Sample Concentration:	25 μg/mL each
Sample Diluent:	75:25 ACN:MeOH with 0.2% HCOOH
Column Temperature:	30 °C
Sample Temperature:	15 °C
Detection:	UV @ 268 nm
Sampling Rate:	40 points/sec
Time Constant:	0.1
Weak Needle Wash:	ACN/H ₂ O 95/5
Instrument:	Waters ACQUITY UPLC with ACQUITY PDA

Gradient

Time(min)	Profile
	%A
0.00	0.1
0.51	0.1
2.11	99.9
2.19	0.1
2.91	0.1

Results and Discussion

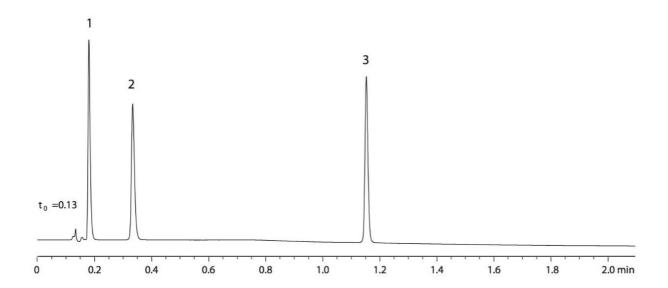

Featured Products

ACQUITY UPLC System https://www.waters.com/514207

ACQUITY UPLC PDA Detector https://www.waters.com/514225

WA60131, August 2009

© 2021 Waters Corporation. All Rights Reserved.