# Waters™

응용 자료

# Gradient Separation of Nutrients on Atlantis HILIC Silica

Waters Corporation



This is an Application Brief and does not contain a detailed Experimental section.

Abstract

This application brief demonstrates the gradient separation of nutrients on Atlantis HILIC Silica Columns.

### Introduction

The componds used in this study are:

- 1. Nicotinamide
- 2. Nicotinic acid
- 3. Thiamine

# Experimental


#### **Method Conditions**

Column:	Atlantis HILIC Silica, 2.1 x 50 mm, 3 $\mu$ m
Part Number:	186002011
Mobile Phase A:	10 mM NH <sub>4</sub> COOH in H <sub>2</sub> O, 0.125% HCOOH in 50:50 ACN:H <sub>2</sub> O
Mobile Phase B:	10 mM NH <sub>4</sub> COOH in H <sub>2</sub> O, 0.125% HCOOH in 90:10 ACN:H <sub>2</sub> O
Flow Rate:	0.6 mL/min
Injection Volume:	5 μL
Sample Concentration:	25 μg/mL each
Sample Diluent:	75:25 ACN:MeOH with 0.2% HCOOH
Column Temperature:	30 °C
Detection:	UV @ 268 nm
Sampling Rate:	40 points/sec
Filter Time Constant:	0.1
Instrument:	Waters ACQUITY UPLC with ACQUITY PDA

#### Gradient:

Time(min)	Profile
	%A
0.00	0.1
1.05	0.1
4.35	99.9
4.50	0.1
6.00	0.1

## Results and Discussion

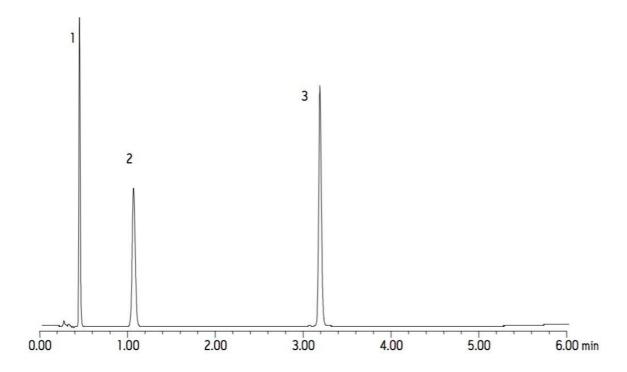

#### Featured Products

ACQUITY UPLC System <a href="https://www.waters.com/514207">https://www.waters.com/514207</a>

ACQUITY UPLC PDA Detector <a href="https://www.waters.com/514225">https://www.waters.com/514225</a>

WA64072, August 2009

© 2021 Waters Corporation. All Rights Reserved.