Waters™

Nota de aplicación

Isocratic Separation of Clonidine on Atlantis HILIC Silica

Waters Corporation



This is an Application Brief and does not contain a detailed Experimental section.

Abstract

This application brief demonstrates the isocratic separation of clonidine on Atlantis HILIC Silica Columns.

Introduction

The compounds used in this study are:

1. Clonidine

Clonidine

Experimental

LC Conditions

Column: Atlantis HILIC Silica, 2.1 x 50 mm, 3 μm

Part Number: 186002011


Mobile Phase A: 200 mM NH₄COOH, pH 3.0

Mobile Phase B: ACN

Flow Rate: 0.3 mL/min

| Isocratic Mobile Phase: | 5% A; 95% B |
|--------------------------|--|
| Injection Volume: | 5.0 µL |
| Sample Diluent: | 75:25 ACN:MeOH |
| Sample Concentration: | 10 ng/mL clonidine |
| Temperature: | Ambient |
| Instrument: | Waters Alliance HT System, 2795 Separations Module with Waters ZQ |
| MS Conditions | |
| Ionization Mode: | ES+ |
| Capillary: | 2.0 kV |
| Cone: | 40 V |
| Extractor: | 3 V |
| RF Lens: | 0.3 V |
| Source Temperature: | 150 °C |
| Desolvation Temperature: | 350 °C |
| Cone Gas Flow: | 50 L/Hr |
| Desolvation Gas Flow: | 700 L/Hr |
| SIR: | 230.2 <i>m/z</i> |
| | |

Results and Discussion

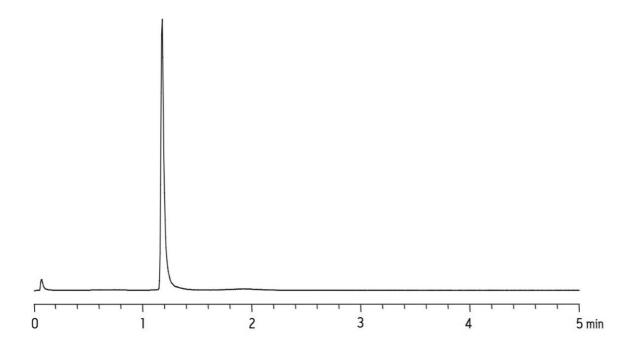

Featured Products

ACQUITY UPLC System https://www.waters.com/514207

WA64074, August 2009

© 2021 Waters Corporation. All Rights Reserved.