
Waters™

アプリケーションノート

Vitamins- Water-Soluble

Waters Corporation

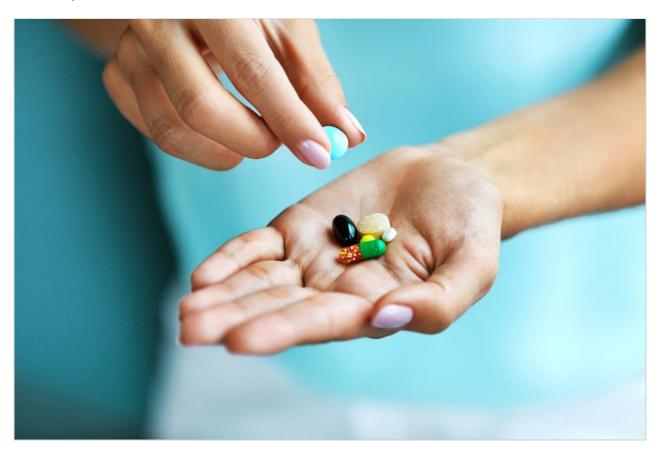

This is an Application Brief and does not contain a detailed Experimental section.

Abstract

This application brief demonstrates analysis of vitamins- water-soluble.

Introduction

The compounds used in this study are –

Compounds	USP Tailing Factors
Niacinamide	n.c.
Calcium Pantothenate	n.c.
Pyridoxal	1.4
Pyrodoxine Hydrochloride	1.1
Pyridoxamine Dihydrochloride	1.2
Riboflavin	1.1
Thiamine Hydrochloride	1.2

1. Niacinamide

2. Calcium Pantothenate

3. Pyridoxal

4. Pyrodoxine Hydrochloride

5. Pyridoxamine Dihydrochloride

7. Thiamine Hydrochloride

HPLC Method

Detection:

Column: Symmetry C₁₈, 3.9 x 150 mm, 5 μm

Part numbers: Column - WAT046980, PIC B6 - WAT084199


Mobile phase: 20 mM PIC B6 (hexane sulfonic acid) and 0.1% phosphoric acid, pH 2.2/methanol 75:25

Flow rate: 0.7 mL/min

Injection volume: 10 μL of mixture with component 1 at 11 μg/mL, 2 at 133 μg/mL, 3 at 17 μg/mL, 4 at 6 μg/mL, 5 at 25 μg/mL, 6 at 34 μg/mL, and 7 at 67 μg/mL

UV @ 210 nm

Results and Discussion

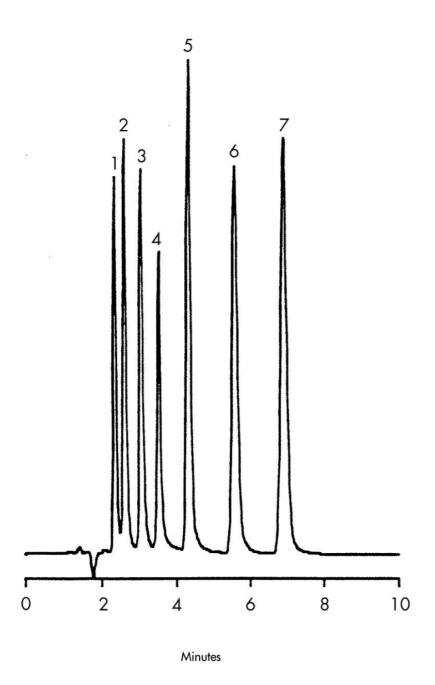

Featured Products

WA31763.180, June 2003

© 2021 Waters Corporation. All Rights Reserved.