Waters™

Applikationsbericht

Propranolol in Rat Plasma by Mixed-Mode SPE and LC-MS/MS (Low Elution Volume)

Waters Corporation



This is an Application Brief and does not contain a detailed Experimental section.

Abstract

This application brief demonstrates the analysis of Propanolol in Rat Plasma by LC-MS/MS.

Introduction

The compound analyzed in this study is Propanolol.

PROPRANOLOL

Experimental

HPLC Method

Column: XTerra MS C_{18} , 2.1 x 30 mm, 3.5 μm

Part number: 186000398

Mobile phase A: Water + 0.5 % NH₄OH

Mobile phase B: ACN + 0.5 % NH_4OH

Flow rate: 0.2 mL/min

Temperature:		Ambient
LC instrument:		Alliance 2795
Gradient		
Time (min)	Profile	
	%A	
0	5	
1	95	
MS Conditions		
MS instrument:		Micromass Quattro Triple Quadrupole
Ion source:		ESI+
Source temp.:		150 °C
Gas cell:		2.0 e ⁻³ bar Argon
Desolvation temp.:		350 °C
Drying gas flow:		500 L/hr
Cone gas flow:		50 L/hr
Cone voltage:		25 V
Collision energy:		20
Capillary voltage:		3.5 Kv

MRM transition:

Metoclopramide (IS) m/z 299.8 \Rightarrow 226.7

Propranolol m/z 259.9 \rightarrow 154.9

Amitriptyline m/z 278.1 \rightarrow 232.9


Nortriptyline m/z 263.9 \rightarrow 190.8

NEW! OASIS® µELUTION PLATE





OASIS® MCX GENERIC EXTRACTION PROTOCOL

Conditions for Oasis® MCX µElution Plate Part Number 186001830

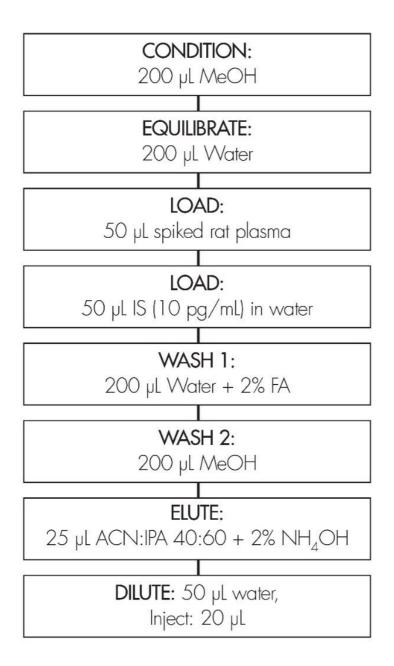

CALIBRATION CURVE

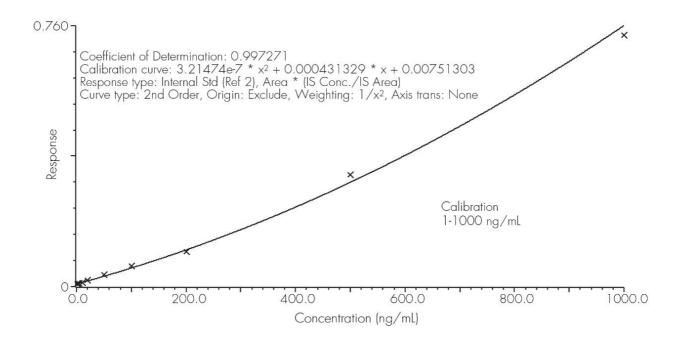

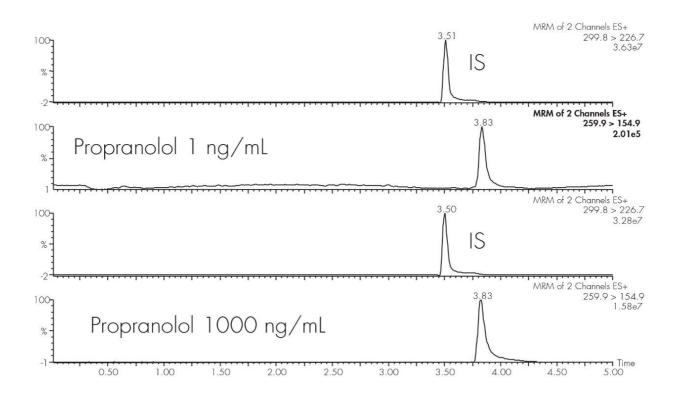

Featured Products

WA31764.132, June 2003

© 2021 Waters Corporation. All Rights Reserved.